




LEXINGTON Manufacturing, Inc.

1330 115th Avenue NW • Minneapolis, MN 55448-3133 • Phone: 763-754-9055 • FAX: 763-754-9605
www.lexingtonmfg.com

RESPONSE CME® (COMBUSTIBLE MATERIAL EJECTION) “Technical Data Sheet”

- No veneer- All solid lumber available in most species upon request
- No visible nail holes
- No glazing compound
- Easy installation
- Intertek-Warnock Hersey listed for 20, 45, 60 & 90 minute wood fire door applications
- Available with fire-rated glass

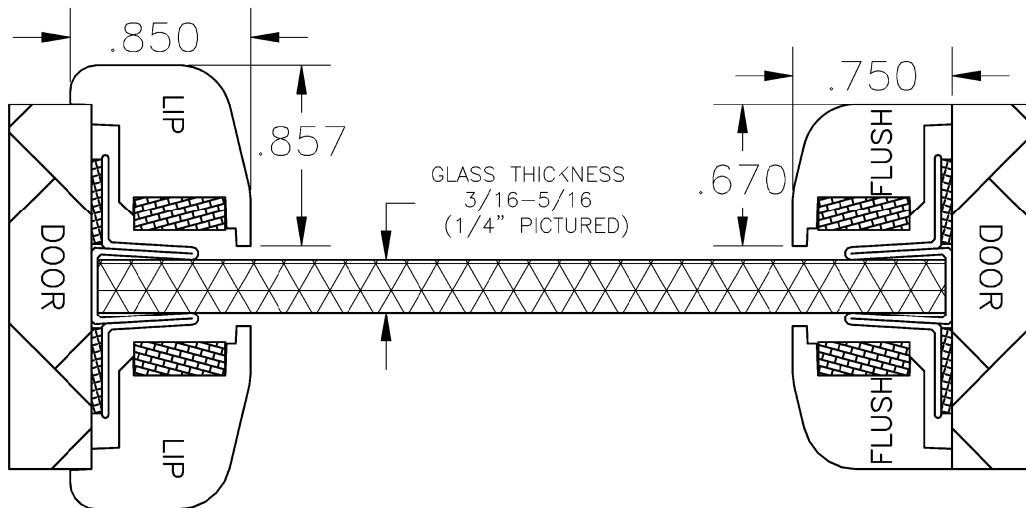

Order Information:

ORDER SIZE (Visible glass) = (Width & Height)

* CUTOUT SIZE = Order size + 1.500"

* GLASS SIZE = Order size + 1.312"

LISTED RATING	20 MINUTE	45 MINUTE	45 MINUTE	60 MINUTE	90 MINUTE
DOOR CORE CONSTRUCTION	AGRIFIBER/ PARTICLEBOARD	AGRIFIBER/ PARTICLEBOARD	MINERAL	MINERAL	MINERAL
DOOR STILE & RAIL CONSTRUCTION	SCL	SCL OR MINERAL	MINERAL	MINERAL	MINERAL
MAXIMUM EXPOSED GLASS AREA	1296 sq. in.	1296 sq. in.	1296 sq. in.	100 sq. in.	100 sq. in.
DIMENSION RESTRICTIONS	Height not to exceed 54 in. Width not to exceed 31 in.	Height not to exceed 54 in. Width not to exceed 31 in.	Height not to exceed 54 in. Width not to exceed 31 in.	None	None