

**STRONGER.
STRAIGHTER.
PROVEN.**

Get to know
TimberStrand® LSL 

I N D U S T R I A L

What is TimberStrand® LSL?



How it's made

Step 1



Step 2



Step 3



Step 4



Stronger

Engineered toughness


Straighter

Solid machinability

Quality guarantee

CORE BENDING STRENGTH COMPARISON

TimberStrand® LSL 38# vs. Traditional Lumber - (AVERAGE MOR - PSI)




TimberStrand® LSL 38#

Multi-directional uses

Fastener holding

Split resistant. Impact tested.

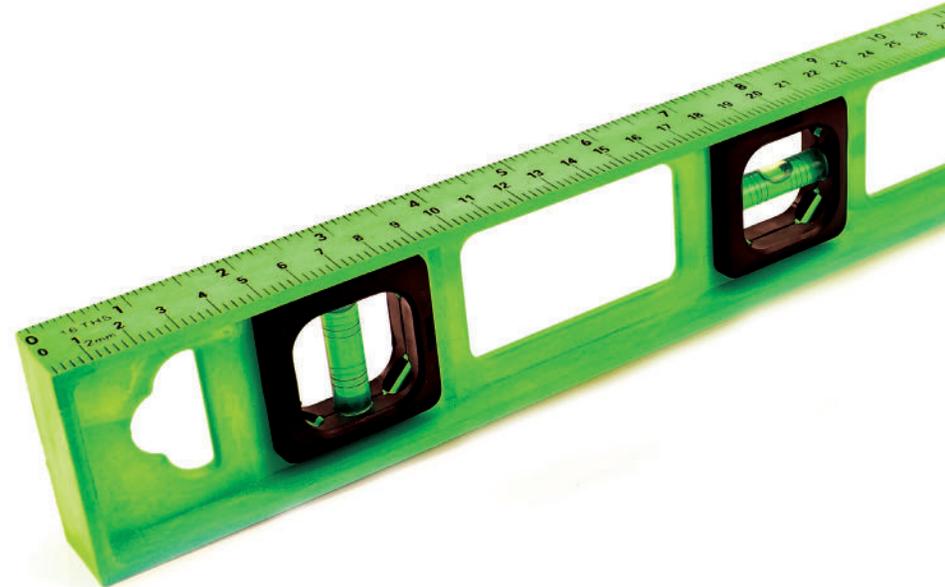

Proven

Setting the bar

FASTENER HOLDING STRENGTH COMPARISON
(8G SCREW WITHDRAWAL - LB/IN.)

117



TimberStrand® LSL
(1.3E & 1.5E)

Widely utilized

Certified and recognized



SUSTAINABLE
FORESTRY
INITIATIVE

Certified Sourcing

www.sfiprogram.org
SFI-0008



Versatile

Customized lengths

Manufactured thickness

Reliable, no matter what



Consistent

Zero defects

Exceptional performance

Consistent price/supply

Smart

Less waste, more profit



Our waste



Traditional lumber waste

Save time and money



Responsible


Utilizing resources

Accountable

Just-in-time delivery


Unmatched performance

TimberStrand® LSL's CARBON FOOTPRINT
(Energy used in manufacturing - Greenhouse Gas statistics)

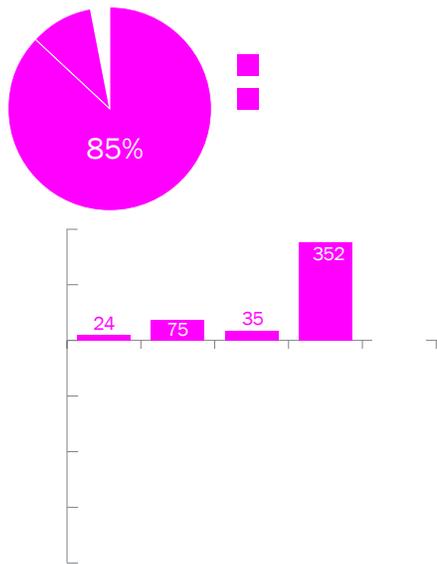

Indoor Air Quality

LEXINGTON MANUFACTURING ON-TIME DELIVERY COMPARISON
(5 year span)

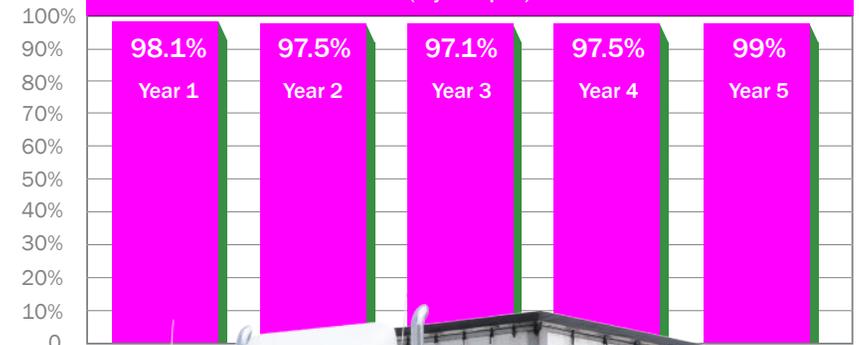

Distributed by:

Clear Label Area
(2.625x1)



10055 Thiesse Road
Brainerd, MN 56401
PHONE (218) 825-8429
FAX (218) 454-4701

Ask us about our FSC availability.

Visit us at LexingtonMFG.com



The mark of
responsible forestry